



GRAFICO

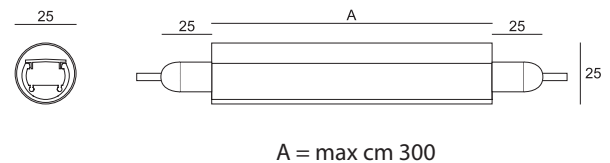

DATI TECNICI

CAVO DI ALIMENTAZIONE FROR CM. 200 + TAPPO

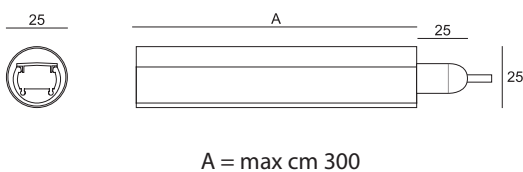

OMEGA WET - 05

60 led/mt 4,8 w/mt
Lm/m 400/360
24 Vdc CRI80 **A** SDCM3

30.000h -20°+40° cm 10

Code - 10 cm

Color

Led

95505

2 Aluminium

1 4000°K
6 3000°K



OMEGA WET - 10

60 led/mt 9,6 w/mt
Lm/m 800/780
24 Vdc CRI80 **A** SDCM3

30.000h -20°+40° cm 5

Code - 10 cm

Color

Led

95510

2 Aluminium

1 4000°K
6 3000°K



OMEGA WET - 14

140 led/mt 14,4 w/mt
Lm/m 1947/1836/1712
24 Vdc CRI90 **A** SDCM3

30.000h -20°+40° cm 5

Code - 10 cm

95524

Color

2 Aluminium

Led

1 4000°K
6 3000°K
8 2700°K

CAVO DI ALIMENTAZIONE FROR CM. 200 + CAVO FROR CM 20



OMEGA WET - 05

60 led/mt 4,8 w/mt
Lm/m 400/360
24 Vdc CRI90 **A** SDCM3

30.000h -20°+40° cm 10

Code - 10 cm

95605

Color

2 Aluminium

Led

1 4000°K
6 3000°K



OMEGA WET - 10

60 led/mt 9,6 w/mt
Lm/m 800/780
24 Vdc CRI90 **A** SDCM3

30.000h -20°+40° cm 5

Code - 10 cm

95610

Color

2 Aluminium

Led

1 4000°K
6 3000°K



OMEGA WET - 14

140 led/mt 14,4 w/mt
Lm/m 1947/1836/1712
24 Vdc CRI90 **A** SDCM3

30.000h -20°+40° cm 5

Code - 10 cm

95624


Color

2 Aluminium

Led

1 4000°K
6 3000°K
8 2700°K

SCHERMI



1 Satinato

2 Trasparente

Led CRI >90 **A** CE IP67