




GRAFICO



DATI TECNICI

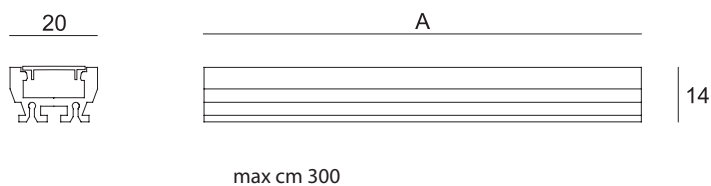

RESINATI DELTA - 05

60 led/mt 4,8 w/mt
Lm/m 438/418
24 Vdc CRI80  SDCM3

 30.000h  -20°+40°  cm 10 

Code - 10 cm

96405

Color

2  Aluminium
4  Corten
5  White

Led

1  4000°K
6  3000°K



RESINATI DELTA - 10

120 led/mt 9,6 w/mt
Lm/m 887/837
24 Vdc CRI80  SDCM3

 30.000h  -20°+40°  cm 5 

Code - 10 cm

96410

Color

2  Aluminium
4  Corten
5  White

Led

1  4000°K
6  3000°K



RESINATI DELTA - 14

140 led/mt 14,4 w/mt
Lm/m 1947/1836/1712
24 Vdc CRI90  SDCM3

 30.000h  -20°+40°  cm 5 

Code - 10 cm

96424

Color

- 2  Aluminium
- 4  Corten
- 5  White

Led

- 1  4000°K
- 6  3000°K
- 8  2700°K

RESINATURA



1 Trasparente 2 Satinato bianco

Solo finitura 2 

Led CRI >90   IP67  

ACCESSORI



Supporto parete/soffitto
Wall/ceiling adjustable support

Code

9656


1,50



Supporto a magneti
Magnet support

Code

9661


13