



STRIP flex 14.4 w/mt 60led/mt - CRI 80 - IP 20

ATHENA

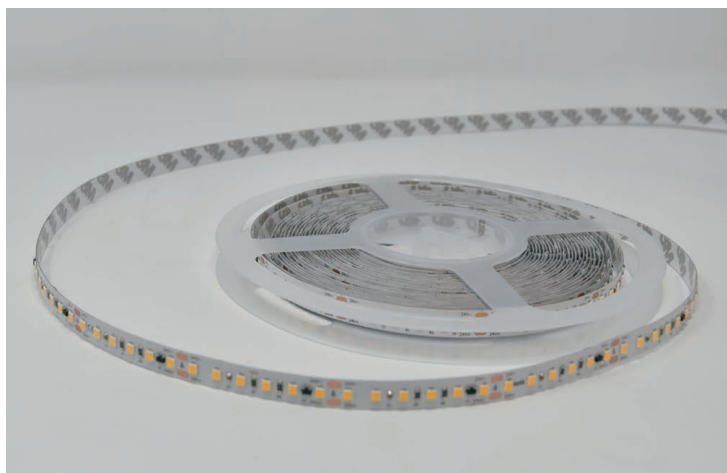

GRAFICO

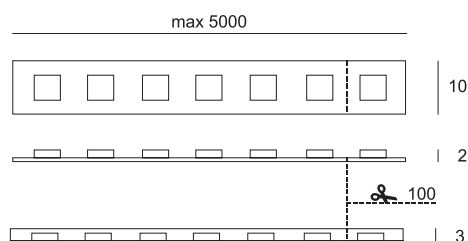

DATI TECNICI



ROLLA CM 500

60 led/mt 14,4 w/mt - IP 20
CRI80 - SDCM3 - SMD 5050
Lm/mt 1-1487 / 6-1380
24 Vdc - input current 0,6 A/mt

30.000h -20°+40° cm 10 6 LED

Code

9910

Led

1 4000/4500°K
6 2800/3300°K
9 RGB



STRIP CM 10

60 led/mt 14,4 w/mt - IP 20
CRI80 - SDCM3 - SMD 5050
Lm/mt 1-1487 / 6-1380
24 Vdc - input current 0,6 A/mt

30.000h -20°+40° cm 10 6 LED

Code - cm 10

9919

Led

1 4000/4500°K
6 2800/3300°K
9 RGB

Installare su superfici dissipanti il calore. Applicazione in luoghi asciutti in ambienti interni.
Install only on dissipating surfaces. Application on a dry place indoors.

Il codice è riferito a cm10 Per definire la lunghezza della strip considerare la misura di taglio del Led
Code is referred to 10cm - To define the final lenght of the strip consider the cut measure of the Led

Led CRI 80 IP 20