




GRAFICO



DATI TECNICI

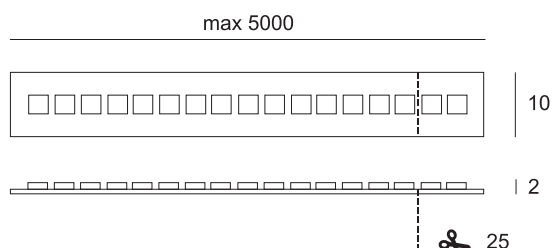

ROLLA CM 500

240 led/mt 19,2 w/mt - IP 20
CRI90 - SDCM3 - SMD 3528
Lm/mt 1-1580 / 6-1540 / 8-1490
24 Vdc - input current 0,8 A/MT

30.000h $-20^{\circ}+40^{\circ}$ cm 2,5 6 LED

Code

979060

Led

1 4000°K
6 3000°K
8 2700°K



STRIP CM 10

240 led/mt 19,2 w/mt - IP 20
CRI90 - SDCM3 - SMD 3528
Lm/mt 1-1580 / 6-1540 / 8-1490
24 Vdc - input current 0,8 A/MT

30.000h $-20^{\circ}+40^{\circ}$ cm 2,5 6 LED

Code - cm 10

979069

Led

1 4000°K
6 3000°K
8 2700°K

Installare su superfici dissipanti il calore. Applicazione in luoghi asciutti in ambienti interni.
Install only on dissipating surfaces. Application on a dry place indoors.

Il codice è riferito a cm10. Per definire la lunghezza della strip considerare la misura di taglio del Led
Code is referred to 10cm - To define the final length of the strip consider the cut measure of the Led

Led CRI 90 IP 20