




GRAFICO



DATI TECNICI

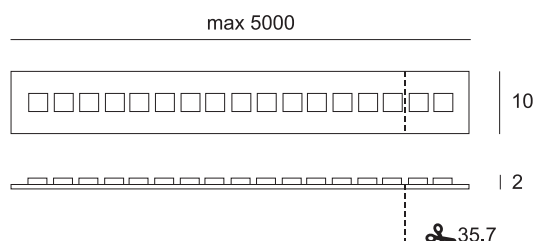

ROLLA CM 500

224 led/mt 20,2 w/mt - IP 20
CRI90 - SDCM3 - SMD2835
Lm/mt 1-3114 / 6-2937 / 8-2740
24 Vdc - input current 0,84 A/MT

30.000h $-20^{\circ}+40^{\circ}$ cm 3,57 8 LED

Code

979020

Led

1 4000°K
6 3000°K
8 2700°K



STRIP CM 10

224 led/mt 20,2 w/mt - IP 20
CRI90 - SDCM3 - SMD2835
Lm/mt 1-3114 / 6-2937 / 8-2740
24 Vdc - input current 0,84 A/MT

30.000h $-20^{\circ}+40^{\circ}$ cm 3,57 8 LED

Code - cm 10

979029

Led

1 4000°K
6 3000°K
8 2700°K

Installare su superfici dissipanti il calore. Applicazione in luoghi asciutti in ambienti interni.
Install only on dissipating surfaces. Application on a dry place indoors.

Il codice è riferito a cm10. Per definire la lunghezza della strip considerare la misura di taglio del Led
Code is referred to 10cm - To define the final lenght of the strip consider the cut measure of the Led

Led CRI 90 IP 20