



STRIP flex 4.8 w/mt 60led/mt - CRI 80 - IP 20


ATHENA

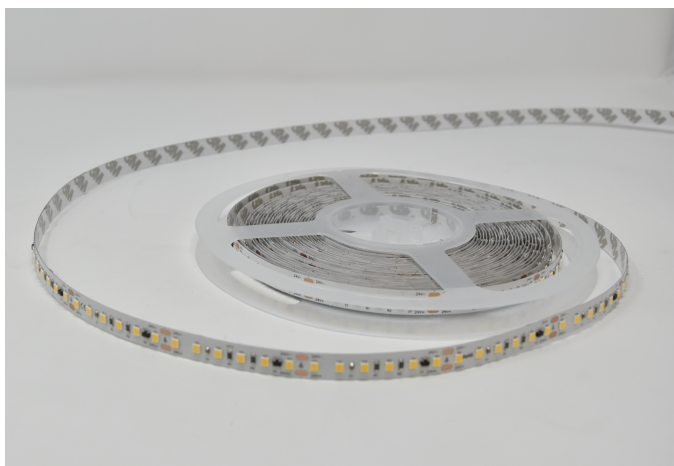

GRAFICO

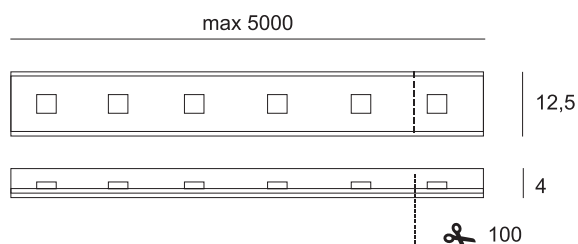

DATI TECNICI



ROLLA CM 500

60 led/mt 4,8 w/mt - IP 20
CRI80 - SDCM3
Lm/mt 1-438 / 6-418
24 Vdc - input current 0,2 A/mt


30.000h $-20^{\circ}+40^{\circ}$ cm 10 6 LED

Code

9710

Led

1 4000-4500°K
6 2800-3000°K



STRIP CM 10

60 led/mt 4,8 w/mt - IP 20
CRI80 - SDCM3
Lm/mt 1-438 / 6-418
24 Vdc - input current 0,2 A/MT

30.000h $-20^{\circ}+40^{\circ}$ cm 10 6 LED

Code - 10 cm

9719

Led

1 4000-4500°K
6 2800-3000°K

Installare su superfici dissipanti il calore. Applicazione in luoghi asciutti in ambienti interni.
Install only on dissipating surfaces. Application on a dry place indoors.

Il codice è riferito a cm10. Per definire la lunghezza della strip considerare la misura di taglio del Led
Code is referred to 10cm - To define the final length of the strip consider the cut measure of the Led

Led CRI 80 **A+** **CE** IP 20