


STRIP flex Dynamic White 19.2 w/mt

120led/mt - CRI 80 - IP 20

ATHENA



GRAFICO

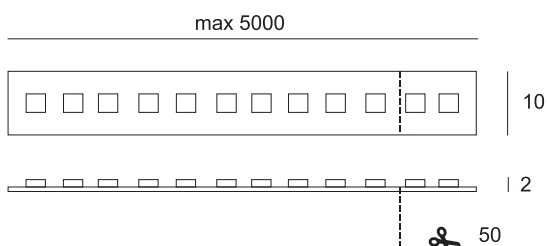

DATI TECNICI



ROLLA CM 500

120 led/mt 19,2 w/mt - IP 20
CRI80 - SDCM3
Lm/mt 800
24 Vdc - input current 0,8 A/mt

⌚ 30.000h 🌡️ -20°+40° ✂️ cm 5 6 LED

Code _____ Led _____

97900 _____
Dynamic White
2700-7000°K



STRIP CM 10

120 led/mt 19,2 w/mt - IP 20
CRI80 - SDCM3
Lm/mt 800
24 Vdc - input current 0,8 A/mt

⌚ 30.000h 🌡️ -20°+40° ✂️ cm 5 6 LED

Code - cm 10 _____ Led _____

97990 _____
Dynamic White
2700-7000°K

Installare su superfici dissipanti il calore. Applicazione in luoghi asciutti in ambienti interni.
Install only on dissipating surfaces. Application on a dry place indoors.

Il codice è riferito a cm10. Per definire la lunghezza della strip considerare la misura di taglio del Led
Code is referred to 10cm - To define the final lenght of the strip consider the cut measure of the Led

Led CRI 80 IP 20