


Tau LED con sensore di presenza (rilevazione max 3 mt. - 120° - max 140W).

Tau LED with presence detector (detection max 3 mt. - 120° - max 140W).



GRAFICO

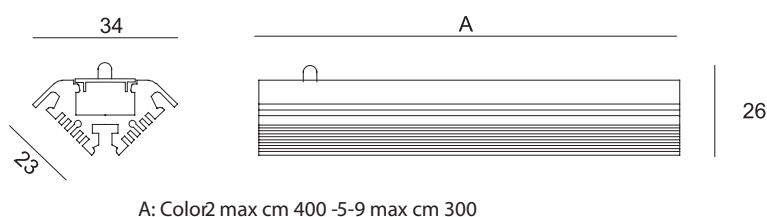

DATI TECNICI



TAU LED MOVE - 10

120 led/mt 9,6 w/mt
Lm/m 887/837
24 Vdc CRI80 **A** SDCM3

30.000h -20°+40° cm 5

Code - 10 cm

91710

Color

2 Aluminium
5 White
9 Black

Led

1 4000°K
6 3000°K



DELTA LED MOVE - 14

140 led/mt 14,4 w/mt
Lm/m 1947/1836/1712
24 Vdc CRI90 **A** SDCM3

30.000h -20°+40° cm 5

Code - 10 cm

91724

Color

2 Aluminium
5 White
9 Black

Led

1 4000°K
6 3000°K
8 2700°K