

OMICRON LED PLAFONE MODULARE

Modulo composto da: profilo in alluminio, Led e schermo in policarbonato. A richiesta è possibile inserire la strip Led IP64 dentro i profili.
 Tappi, drivers e accessori da ordinare separatamente.
 Profile, Led and polycarbonate PMMA screen included. On demand it is possible to insert strip Led IP64 into profiles.
 Dead ends, drivers and accessories must be ordered separately.



Watt/m	1 Linea Led	2 Linee Led	Color	Led
	Code - 10 cm	Code - 10cm		
19,2	98210109	98210209	3 Gold	1 4000°K
20,2	98310109	98310209	4 Corten	6 3000°K
14,4	98410109	98410209	5 White	8 2700°K
			6 Ardesia	
			7 Grey	
			9 Black	

Code	Linee x	Led/mt	Lm/mt	Lm/mt	Lm/mt	Code	Linee x	Led/mt	Lm/mt	Lm/mt	Lm/mt
1 LINEA	W/mt		4000°K	3000°K	2700°K	2 LINEE	W/mt		4000°K	3000°K	2700°K
98210109	1x19,2	240	1580	1540	1490	98210209	2x19,2	480	3160	3080	2980
98310109	1x20,2	224	3114	2937	2740	98310209	2x20,2	448	6228	5874	5480
98410109	1x14,4	140	1947	1836	1712	98410209	2x14,4	240	3894	3672	3424

24 Vdc CRI90 SDCM3 30.000h -20° + 40° 14,4 5,1 cm - 19,2 2,5 cm - 20,2 3,57 cm

SCHERMI




1 Satinato 4 Curvo 5 Prismatico

ACCESSORI Elenco completo accessori pag 18

UGR<19

9895

Utilizzabile solo con schermo prismatico e profili con una linea Led.
 Use only with prismatic screen and profiles with 1 line Led.

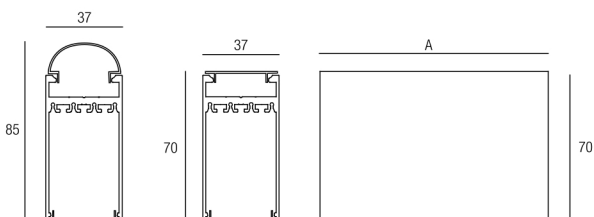

A: Color: 3 max cm 200 - 4-5-6-7-9 max cm 300

Led CRI >90 IP 40